


JUST-Clean FPU-120



Description

Especially suitable for damaged, PVC and plastic belts.
It is used on light conveyor belts systems. Particularly wear resistant due to High-Quality PU segments. Automatic regulation of the contact pressure. Also suitable for reversing conveyors.
Low installation height and easy installation. Adjustable without special knowledge. Low maintenance.

Technical data

Technical data polyurethane


Extreme abrasion resistance (30-40 mm³ according to DIN 53516)
Good aging and weather resistance
Resistant to oil, fat, gasoline, ozone and nitrogen
Excellent notch and fracture toughness
High tensile strength and elongation at break
Special weight approx. 1.26 g/cm³
Heat resistant: -30°C to +80°C

Technical data supporting tube

Tolerances according to EN ISO 1127 for seamless and welded tubes

ORDER INFORMATION

Art. No.	Blade coverage, mm	Belt width, mm	Tube length, mm	Tube diameter, mm	Number of segments
TC0480A	480	500	1100	51	4
TC0600A	600	650	1250	51	5
TC0720A	720	800	1400	51	6
TC0960A	960	1000	1600	63,5	8
TC1080A	1080	1200	1800	63,5	9
TC1320A	1320	1400	2000	63,5	11
TC1560A	1560	1600	2200	63,5	13

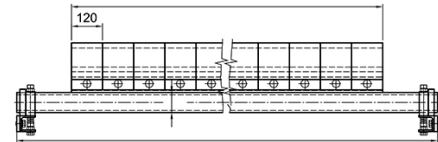

ADDITIONAL INFORMATION



Download the file



Download the drawing

FREQUENTLY ASKED QUESTIONS

Über uns

Janco HandelsGmbH • Schubertstr. 65 • 15234 Frankfurt (Oder) • Germany • +49 335 401 464 82 • office.janco@gmail.com

[Impressum](#)

[AGB](#)

[Datenschutzerklärung](#)